

### **iConverter Tx/2Fx and Tx/2Tx** Redundant Fast Ethernet Fiber & UTP Managed Ethernet Media Converters

The *iConverter* Redundant Fast Ethernet managed media converters are members of the modular *iConverter* product family, and include:


- Tx/2Tx - 100BASE-TX UTP to dual 100BASE-TX UTP
- Tx/2Fx - 100BASE-TX UTP to dual 100BASE-FX dual fiber
- Tx/2Fx SF - 100BASE-TX UTP to dual 100BASE-FX single-fiber

The *iConverter* Redundant Fast Ethernet modules are designed for use in networks that require fiber or copper link redundancy. With a link fault detection time of 100 microseconds, the Redundant *iConverter* modules provide the rapid response time required for mission-critical applications.


All ports support Half or Full-Duplex operation, and the UTP ports can auto-negotiate or be manually set to a required duplex mode. The fiber ports are always set to manual mode. All ports in an application must be set to the same duplex mode.

All ports support Link Propagation (Link Loss Carry Forward), Link Segmentation, Remote Fault Detection and Symmetrical Fault Detection modes to facilitate quick fault detection, isolation and reporting.

*iConverter* Redundant Fast Ethernet modules are hot-swappable and can be mounted in a 19-Module (2U high) or 5-Module (1U high) rack-mountable chassis (19-inch or 23-inch) with any combination of redundant AC, 24VDC or 48VDC power supplies. They can also be mounted in a 2-Module AC or 18 to 60VDC powered chassis, or in a 1-Module AC/DC powered chassis.

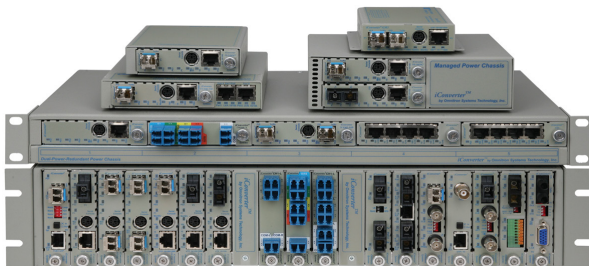

The *iConverter* Multi-Service Platform consists of Network Interface Devices, T1/E1 multiplexers, CWDM multiplexers and managed media converters that combine to deliver Carrier Ethernet and TDM services over fiber or CWDM wavelengths. This flexible architecture supports a wide variety of configurations for scalable and reliable fiber connectivity in Service Provider and Enterprise networks.

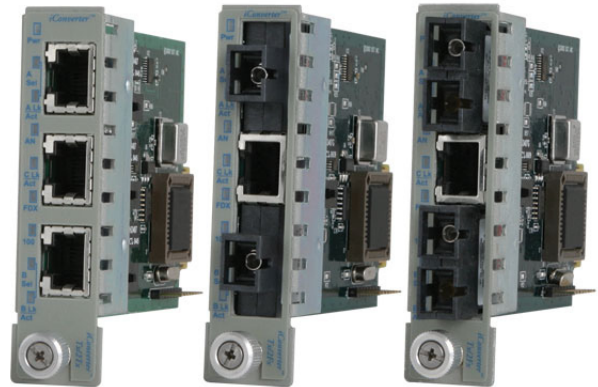

### **KEY FEATURES**

- The *iConverter* Redundant Fast Ethernet modules provide hot backup, 100 microseconds link redundancy for critical applications
- Tx/2Fx model provides 100BASE-TX UTP to two 100BASE-FX fiber links
- Tx/2Tx models provide 100BASE-TX UTP to two 100BASE-TX UTP copper links
- Fiber modules support multimode, single-mode, and single-fiber with ST, SC and LC connectors
- Auto-negotiation or forced Half/Full-Duplex and crossover switches on all UTP ports
- User-selectable link fault detection modes facilitate quick fault detection, isolation and reporting
- Management is available with the addition of a management module to the chassis
- SNMP management via *NetOutlook*® provides real-time port and module information, remote parameter configuration and trap notification
- Modules are hot-swappable in 19-Module, 5-Module, 2-Module or 1-Module chassis
- Lifetime Warranty and free 24/7 Technical Support

# SPECIFICATIONS

<b>Model Type</b>	Tx/2Fx	Tx/2Tx
<b>Protocols</b>	100BASE-FX, 100BASE-TX	100BASE-TX
<b>Primary Connectors</b>	RJ-45	RJ-45
<b>Redundant Connectors</b>	SC, ST, LC, Single-Fiber SC	RJ-45
<b>Controls</b>	UTP X-over, LS/LP, RFD, SFD, UTP Auto/Man, FDX/HDX	UTP X-over, LS/LP, RFD, SFD, UTP Auto/Man, FDX/HDX
<b>LED Displays</b>	Power, FO link, UTP link, Select, Auto, FDX/HDX	Power, UTP link, UTP link, Select, Auto, FDX/HDX
<b>Dimensions</b>	W: 0.85" x D: 4.5" x H: 2.8"	
<b>Weight</b>	8 oz.	
<b>Compliance</b>	UL, CE, FCC Class A	
<b>Power Requirement</b>	0.7A @ 3.3VDC (typical)	1.1A @ 3.3VDC
<b>Temperature</b>	Standard: Wide: Storage:	0 to 50° C -40 to 60° C -40 to 80° C
<b>Humidity</b>	5 to 95% (non-condensing)	
<b>Altitude</b>	-100m to 4000m	
<b>MTBF (hrs)</b>	520,000	

# MANAGEMENT

Management is accomplished by using a Network Management Module (NMM) or a media converter with integrated management (such as an *iConverter 10/100M2*) that provides monitoring, remote configuration and trap notification. The management module can be accessed via SNMP, Telnet and via a serial port. The SNMP-based management is accomplished via Omnitron's intuitive, graphic-oriented *NetOutlook* management software or third party SNMP management software. Management via the Telnet and the serial interfaces have an easy-to-use, menu-driven interface.

Some of the real-time parameters that can be monitored include port state (active, standby), link and data receive status. Other parameters include module type and model, hardware and software revisions, serial numbers, and an user-defined identifier.

The user can override the redundant module's physical DIP-switch settings by using SNMP or Telnet to remotely configure DIP-switch-selectable parameters such as Link Propagate, Link Segment or Remote Fault Detection.

In addition to all standard *iConverter* SNMP traps such as module insertion and removal, the redundant modules can generate traps on port state changes including link-up and link-down. Trap monitoring of specific events can be selectively enabled or disabled by the network administrator.

# ORDERING INFORMATION

Type	Distance	Connector Type				Tx [nm]	Rx [nm]	Min. Tx Power [dBm]	Max. Tx Power [dBm]	Min. Rx Power [dBm]	Max. Rx Power [dBm]	Min. Attenuation (dB)	Link Budget [dB]
		ST	SC	LC	RJ-45								
<b>Tx/2Fx</b>													
MM/DF	5km	<b>8420-0</b>	<b>8422-0</b>	-	-	1310	1310	-24	-14	-31	-14	-	7
SM/DF	30km	<b>8421-1</b>	<b>8423-1</b>	<b>8427-1</b>	-	1310	1310	-15	-8	-31	-8	-	16
SM/DF	60km	<b>8421-2</b>	<b>8423-2</b>	<b>8427-2</b>	-	1310	1310	-5	0	-31	-3	3	26
SM/DF	120km	-	<b>8423-3</b>	<b>8427-3</b>	-	1550	1550	-5	0	-31	-3	3	26
SM/SF	20km	-	<b>8430-1</b>	-	-	1310	1550	-15	-5	-30	-3	-	15
SM/SF	20km	-	<b>8431-1</b>	-	-	1550	1310	-15	-5	-30	-3	-	15
SM/SF	40km	-	<b>8430-2</b>	-	-	1310	1550	-8	0	-30	-3	3	22
SM/SF	40km	-	<b>8431-2</b>	-	-	1550	1310	-8	0	-30	-3	3	22
SM/SF	60km	-	<b>8430-3</b>	-	-	1310	1550	-5	0	-31	-3	-	26
SM/SF	60km	-	<b>8431-3</b>	-	-	1550	1310	-5	0	-31	-3	-	26
<b>Tx/2Tx</b>													
UTP	100m	-	-	-	<b>8400-0</b>	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

For wide temperature (-40 to 60° C), add a "W" to the end of the model number. Consult factory for extended temperature (-40 to 75° C) models.

When using single-fiber (SF) media converter models, the Tx wavelength on one end has to match the Rx wavelength on the other.

© 2012 Omnitron Systems Technology, Inc. All rights reserved. *iConverter* and *NetOutlook* are Registered Trademarks of Omnitron Systems Technology, Inc. Trademarks are owned by their respective companies. Specifications are subject to change without notice.  
091-18400-002E 12/12

