

# FlexPoint

## FlexPoint™ 10FL/2 10BASE-FL Fiber to 10BASE-2 Coax Media Converter

The FlexPoint 10FL/2 is a modular 10BASE-FL fiber to 10BASE-2 coax media converter. The FlexPoint 10FL/2 connects and extends coax segments via fiber, and a pair of 10FL/2 converters connect two coax segments via fiber.

No manual configuration is required with the plug-and-play FlexPoint 10FL/2. Connect the fiber and coax cables and the installation is complete.

The fiber port operates at 850nm or 1310nm and features ST connectors. Multimode fiber models support distances of up to 5km, and single-mode fiber model support a distance of 30km.

The FlexPoint 10FL/2 features a BNC connector supporting 50 ohm cabling with distances up to 185m. Per IEEE 802.3 standard, up to 30 workstations can be attached to the coax segment. A termination switch provides a convenient 50 ohm cable termination.

Descriptions of the LED indicators are provided on the label for easy in-the-field installation and maintenance. The LEDs report the availability of power, port activity and link status, collision and jabbers.

FlexPoint modules can be mounted utilizing optional wall-mounting hardware or with DIN-rail mounting brackets. They can also be rack-mounted in a 5-Module shelf or in a high-density 14-Module, power-redundant Powered Chassis.

FlexPoint modules installed in the 5-Module shelf or used as standalone devices can be powered by an external AC to DC power adapter, or through the 5VDC chassis connector. Standalone modules can also be powered by attaching an external DC power supply (18-60VDC). When used in the 14-Module power-redundant Powered Chassis with any combination of AC and DC power supplies, the installed modules are powered via the 5VDC chassis connector.

The wide variety of FlexPoint mounting and power options provide flexible upgrade paths as network requirements change and grow.

Simple, dependable and flexible. For over a decade, FlexPoint media converters have been providing reliable fiber connectivity in Enterprise and mission-critical networks around the world.



- The FlexPoint 10FL/2 is an 10BASE-FL fiber to 10BASE-2 coax media converter
- Seamlessly connects and extends 10BASE-2 coax network segments via fiber
- Features convenient, switch-selectable coax line termination to save cost and space
- Extends network distances up to 30km
- Labeled status LEDs for quick and easy installation
- Wall-mount or rack-mount on a 5-Module shelf or in a 14-Module power-redundant FlexPoint Powered Chassis
- Completely software independent with no installation of drivers required
- Peace-of-mind reliability backed by a lifetime warranty and free 24/7 technical support


# SPECIFICATIONS

Model Type	10FL/2		
Protocols	IEEE 802.3, 10BASE-FL, 10BASE-2		
UTP Cable	EIA/TIA 568A/B, Category 5 and higher		
Fiber Cables	Multimode: 50/125, 62.5/125, 100/140µm Single-mode: 9/125µm		
Copper Connectors	BNC, 50 ohm, RG-58/U, RG-58C/U, RG-58/U or equivalent		
Fiber Connectors	ST		
Switches	User Selectable Coax termination		
LED Displays	<b>Power:</b> Yellow LED    Power Applied <b>Jabber:</b> Red LED    Jabber Condition <b>Fiber Link:</b> Green LED    Device Present <b>Fiber Receive:</b> Green LED    Data Received <b>Coax Receive:</b> Green LED    Data Received <b>Collision:</b> Yellow LED    Collision Detected		
Dimensions	W: 3.0" x D: 4.0" x H: 1.0"		
Weight	6 oz. (without power adapter)		
Compliance	UL, CE, FCC Class A		
Power Requirements	<b>Barrel Connector</b>		<b>Molex Connector</b>
	<b>Nominal Voltage:</b> 9VDC		5VDC
	<b>Voltage Range:</b> 6.0 to 15.0VDC		4.75 to 5.25VDC
	<b>Power Nominal:</b> 0.8A @ 9VDC		0.8A @ 5VDC
	<b>Maximum Power:</b> 1A @ 9VDC		1A @ 5VDC
Temperature	0 to 50° C		
Humidity	5 to 95% (non-condensing)		
Altitude	-100m to 4000m		
MTBF (Hours)	Module without Power Adapter: 1,200,000 Module with Power Adapter -1: 250,000 Module with Power Adapter -2: 100,000		



# APPLICATION EXAMPLES

A pair of FlexPoint 10FL/2 media converters (A) enable two separate 10BASE-2 coax segments to be connected via fiber, extending network connectivity. A FlexPoint 10FL/T (B) provides connection to a UTP switch and extends the network via fiber to a FlexPoint 10FL/2 connecting multiple workstations on a 10BASE-2 network segment. In both cases, multimode or single-mode fiber can be used. Network connectivity can be extended up to 30km using single-mode fiber.

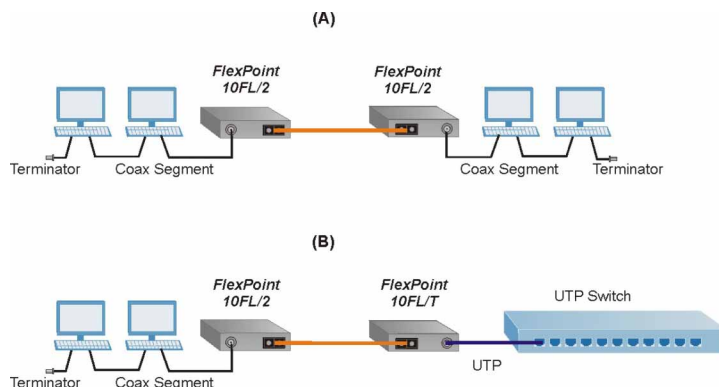

# ORDERING INFORMATION

Fiber Type	Distance	Connector Type	Tx / Rx Wavelength [nm]	Min. Tx Power [dBm]	Max. Tx Power [dBm]	Min. Rx Sense [dBm]	Max. Rx Power [dBm]	Optical Power Budget
		ST						
MM	2km	4310-x	850	-21	-11	-31	-11	10
MM	5km*	4312-x	1310	-21	-11	-31	-11	10
SM	30km*	4311-x	1310	-15	-8	-31	-8	16

**Power Adapter Kits (-x):** -0 = No power adapter included, -1 = 110-120 VAC/60 Hz (US plug), -2 = 100-240 VAC/50-60 Hz (IEC plug, no power cord)

For other power and fiber configurations, please consult the factory.

\* When operating in half-duplex, the maximum distance is 2km.

Trademarks are owned by their respective companies. FlexPoint is a trademark of Omnitron Systems Technology, Inc. Specifications subject to change without notice. ©2009 Omnitron Systems Technology, Inc.

091-04310-005E 1/09

