

### miConverter™ 10/100 PoE/D

#### 10/100BASE-T to 100BASE-X Ethernet Media Converters with PoE Powering

The miniature miConverter 10/100 PoE/D is a rate-switching 10/100 RJ-45 copper to 100BASE-X fiber media converter that can be powered with Power over Ethernet (PoE) when connected to PoE switches and midspans. It can also be powered with DC power or AC power with an external power adapter. The miConverter 10/100 PoE/D miniature Ethernet media converters provide cost-effective copper-to-fiber connectivity solutions. Due to their size, portability, and low power consumption, they are ideal for fiber-to-the-desktop/laptop under the desk deployments and mission-critical field diagnostic applications.

The miConverter 10/100 PoE/D features fixed fiber connectors and Small Form Pluggable (SFP) transceivers. ST, SC and LC fixed fiber connectors support multimode, single-mode, and single-mode single-fiber. 100BASE-X SFP transceivers enable adaptability to different fiber types and wavelengths, including Coarse Wave Division Multiplexing (CWDM) wavelengths to increase the bandwidth capacity of fiber infrastructure.

The RJ-45 port can auto-negotiate by detecting the speed and duplex-mode of the connected device. Upon connection to the UTP device, the RJ-45 port speed adjusts to either 10Mbps or 100Mbps, and the duplex-mode adjusts to either Full-Duplex or Half-Duplex. Auto-crossover enables the connection to workstations (MDI port) or hub/switches (MDI-X port) without requiring a crossover cable.

DIP-switches enable manual configuration of the RJ-45 port speed and duplex modes, and configuration of Link Modes (fault-detection capabilities) that enable in the identification and isolation of link failures.

Diagnostic data is provided through front-panel LED indicators that assist in network installation and maintenance. The LEDs display the availability of power, port activity, link status, and the speed and duplex modes of the RJ-45 port.

The miConverter 10/100 PoE/D features power redundancy with AC or DC external power options when used with PoE powering. AC power adapter is available in US, Universal and Country/Region specific models. Country/Region specific models feature optional interchangeable connectors, allowing for compatibility with electrical outlet types found around the world. DC power up to 60VDC is available with a terminal connector option.

The miConverter 10/100 PoE/D is available with or without integrated mounting brackets. miConverter 10/100 PoE/D models without integrated mounting brackets can be installed in the miConverter 18-Module Powered Chassis.



SFP not included

### KEY FEATURES

- Cost-effective, miniature 10/100BASE-T to 100BASE-X Ethernet media converter powered by PoE
- Supports 10BASE-T, 100BASE-TX, 100BASE-X and IEEE 802.3 specifications
- Compact and light weight
- Fixed fiber port supports multimode and single-mode dual fiber with ST, SC and LC connectors; and single-mode single-fiber with SC connectors
- SFP transceivers for standard or CWDM wavelengths
- RJ-45/PoE port supports Full/Half-Duplex auto-negotiation and MDI/MDIX auto-crossover
- LED indicators for RJ-45 and fiber port status
- User-selectable link fault detection modes facilitate quick fault detection, isolation and reporting
- Power-over-Ethernet (IEEE 802.3af PoE/PD) with redundant power options:
  - Wide Range DC Power input 8-60VDC (2-Pin Terminal) or
  - US, Universal and Country/Region specific AC power adapter (Barrel Connector)
- Available with or without integrated mounting brackets
- Models without integrated mounting brackets can be installed in an 18-Module Powered Chassis
- Commercial (0 to 50°C), Wide (-40° to 60°C), Extended (-40° to 75°C) and Industrial\* (-40° to 85°C) temperature ranges
- TAA, BAA and NDAA compliant, and Made in the USA
- Lifetime Warranty and free 24/7 Technical Support

\* DC Terminal Model Only


# APPLICATION EXAMPLES

## Fiber Distance Extension with PoE

PoE switches are used to provide data and power via copper UTP cabling to Powered Devices (PDs) such as VoIP phones, Wi-Fi Access Points and IP cameras. When the distance to the PD exceeds the 100 meter distance limitation of UTP cable, fiber can be deployed to extend the distance to PDs in remote locations.

The application example below shows how miConverter 10/100 PoE/D converters are deployed to enable plug-and-play fiber connectivity from PoE switches.

The miConverter 10/100 PoE/D is powered by a UTP patch cable and converts the copper to fiber to connect to a remote PoE IP camera. At the remote end of the fiber run, an OmniConverter PoE power-sourcing media converter converts the fiber back to copper and injects PoE (up to 60W) to power the IP camera. The OmniConverter is powered by AC power and injects up to 60W PoE.

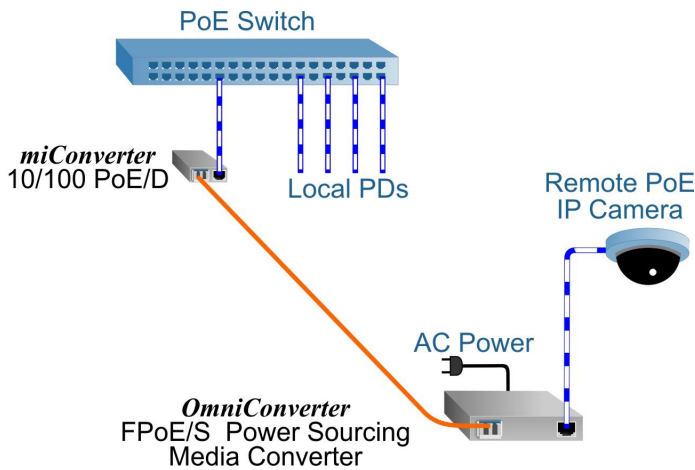


## Fiber to the Premises

In the application example shown below, the miConverter 10/100 PoE/D provides outdoor media conversion for an FTTx service without an outdoor power source.

A Service Provider deploys the miConverter 10/100 PoE/D in a NEMA enclosure on the outside wall of a customer premises for fiber to copper conversion that provides connectivity to the indoor demarcation router.

The miConverter 10/100 PoE/D is powered by a midspan located inside the customer premises. This enables fast and simple installation of the media converter, and eliminates the cost of installing an outdoor power outlet.

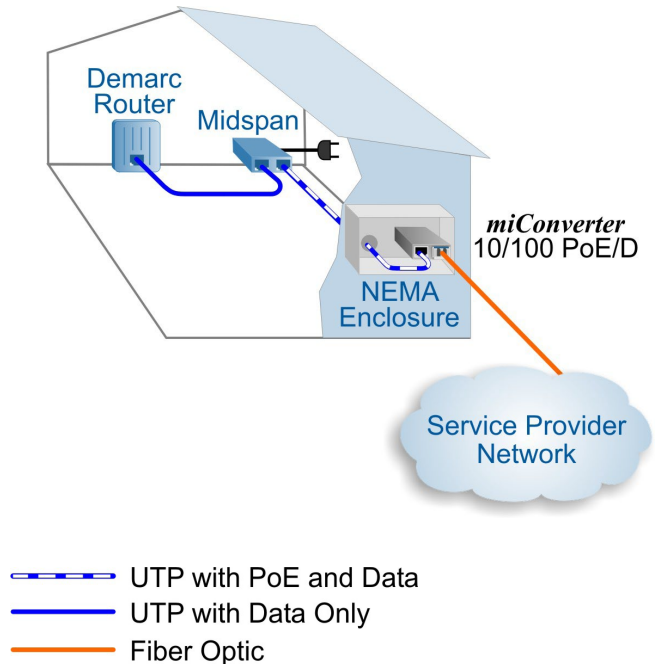

## CHASSIS OPTIONS

miConverter 10/100 PoE/D models without integrated mounting brackets can be installed in the miConverter 18-Module Powered Chassis to consolidate modules into a rack-mount form factor and distribute multiple fiber optic links from PoE switch equipment. Only miConverter 10/100 PoE/D models with AC barrel connectors can be installed in the chassis.

The chassis provides redundant power to the modules with barrel-style DC connectors, and is available with an integrated universal AC, 24VDC or 48VDC power supply.

The compact, high-density chassis is 1.5 rack units high, and can be mounted in a standard 19" or 23" equipment rack.



## ACCESSORIES

Chassis, Mounting Options and Accessories	
Model Number	Description
1020-1	18-Module AC Powered Chassis*
1025-1	18-Module 48VDC Powered Chassis*
1026-1	18-Module 24VDC Powered Chassis*
8252-0	DIN Rail Mounting Clip
9119-PSE	Spare JET/PSE certified Universal AC/DC Power Adapter for Wide and Extended temperature models (no power cord)
9129-PS	Spare Universal AC/DC Power Adapter for Wide and Extended temperature models (no power cord)
* Not for use with Extended temperature or DC Terminal Connector models. Contact Omnitron for replacement power adapters and other accessories.	

## SPECIFICATIONS

Description		<i>miConverter 10/100 PoE/D</i>	
Standard Compliances		IEEE 802.3, 802.3af	
Regulatory Compliances		Safety: EMI: ACT:	UL, cUL, CE, UKCA FCC Class A TAA, BAA, NDA
Environmental		RoHS, REACH, WEEE	
Frame Size		Up to 2,048 bytes	
Port Types		Copper: Fiber:	10/100BASE-T (RJ-45) 100BASE-X (ST, SC, LC, SFP)
Cable Types		Copper: Fiber:	EIA/TIA 568A/B, Cat 5 UTP and higher Multimode: 50/125µm, 62.5/125µm Single-mode: 9/125µm
AC Power Requirements		AC/DC Adapter:	100 - 240VAC/50 - 60Hz 0.03A @ 120VAC (max)
DC Power Requirements		DC Input: (AC/DC Adapter)	8.0 to 60.0VDC 0.28A @ 9VDC 2.5mm Barrel Connector
		DC Input: (Terminal Connector)	8.0 to 60.0VDC 0.28A @ 9VDC 2-Pin Terminal (non-isolated)
		DC Input: (PoE)	44 - 57VDC, 0.05A @ 48VDC (typical) RJ-45 (Alternative A & B)
Dimensions (W x D x H)		Module: Module: w/Integrated Brackets	1.71" x 4.10" x 0.84" (43.4 mm x 104.1 mm x 21.3 mm) 2.41" x 4.10" x 0.84" (61.2 mm x 104.1 mm x 21.3 mm)
Weight		Module Only: with AC/DC Adapter:	4 oz. (113.4 grams) 12 oz. (340.2 grams)
Temperature		Commercial: Wide: Extended: Industrial: Storage:	0 to 50°C -40 to 60°C, -20°C AC cold start -40 to 75°C, -20°C AC cold start -40 to 85°C -50 to 85°C
Humidity		5 to 95% (non-condensing)	
Altitude		-100m to 4,000m	
MTBF (hrs)		Module Only: AC/DC Adapter:	1,160,000 206,000
Warranty		Lifetime warranty with 24/7/365 free Technical Support	

# ORDERING INFORMATION

## Step 1: Choose a Base Part Number (xxxxD-x-bpt)

Fiber Type	Distances	Connector Types				Tx / Rx Lambda (nm)	Min. Tx Power (dBm)	Max. Tx Power (dBm)	Min. Rx Power (dBm)	Max. Rx Power (dBm)	Min Attenuation (dB)	Link Budget (dB)
		ST	SC	LC	SFP							
-	-	-	-	-	1119D-0-bpt	-	-	-	-	-	-	-
MM/DF	5km	1100D-0-bpt	1102D-0-bpt	1106D-0-bpt	-	1310 / 1310	-24	-14	-31	-14	-	7
SM/DF	30km	1101D-1-bpt	1103D-1-bpt	1107D-1-bpt	-	1310 / 1310	-15	-8	-31	-8	-	16
SM/DF	60km	1101D-2-bpt	1103D-2-bpt	-	-	1310 / 1310	-5	0	-31	-3	3	26
SM/DF	120km	-	1103D-3-bpt	-	-	1550 / 1550	-5	0	-31	-3	3	26
MM/SF <sup>1</sup>	5km	-	1110D-0-bpt	-	-	1310 / 1550	-8	0	-28	0	-	20
MM/SF <sup>1</sup>	5km	-	1111D-0-bpt	-	-	1550 / 1310	-8	0	-28	0	-	20
SM/SF <sup>1</sup>	20km	-	1110D-1-bpt	-	-	1310 / 1550	-15	-5	-30	-3	-	15
SM/SF <sup>1</sup>	20km	-	1111D-1-bpt	-	-	1550 / 1310	-15	-5	-30	-3	-	15
SM/SF <sup>1</sup>	40km	-	1110D-2-bpt	-	-	1310 / 1550	-8	0	-30	-3	3	22
SM/SF <sup>1</sup>	40km	-	1111D-2-bpt	-	-	1550 / 1310	-8	0	-30	-3	3	22
SM/SF <sup>1</sup>	60km	-	1110D-3-bpt	-	-	1310 / 1550	-5	0	-31	-3	3	26
SM/SF <sup>1</sup>	60km	-	1111D-3-bpt	-	-	1550 / 1310	-5	0	-31	-3	3	26

<sup>1</sup> When using single-fiber (SF) media converter models, the Tx wavelength on one end has to match the Rx wavelength on the other.

MM = Multimode, SM = Single-mode, DF = Dual Fiber, SF = Single-fiber

Contact Omnitron for other fiber options. Order the appropriate SFPs separately. [Visit the Omnitron Optical Transceivers web page.](#)

## Step 2: Choose a Mounting Bracket Option (xxxxD-x-bpt)

<b>0</b> = Without Integrated Mounting Brackets
<b>1</b> = With Integrated Mounting Brackets

## Step 3: Choose a Power Option (xxxxD-x-bpt)

<b>0</b> = PoE/PD Power, Barrel Connector, No AC/DC Power Adapter
<b>1</b> = PoE/PD Power, Barrel Connector and AC/DC Power Adapter, 100-240VAC, 50-60Hz, with US power clip
<b>2</b> = PoE/PD Power, Barrel Connector and Universal AC/DC Power Adapter, 100-240VAC, 50-60Hz (requires AC power cord)
<b>3</b> = PoE/PD Power, Barrel Connector and AC/DC Power Adapter, 100-240VAC, 50-60Hz, with European power clip - <b>No AC power cord with Z temp models</b>
<b>4</b> = PoE/PD Power, Barrel Connector and AC/DC Power Adapter, 100-240VAC, 50-60Hz, with UK power clip - <b>No AC power cord with Z temp models</b>
<b>5</b> = PoE/PD Power, Barrel Connector and AC/DC Power Adapter, 100-240VAC, 50-60Hz, with Australian power clip - <b>No AC power cord with Z temp models</b>
<b>8</b> = PoE/PD Power, Barrel Connector and AC/DC Power Adapter, 100-240VAC, 50-60Hz, with US/Japan power clip - <b>No AC power cord with Z temp models</b>
<b>9</b> = PoE/PD Power, 2 Pin DC Terminal Connector 8-60VDC, No Power Adapter

## Step 4: Choose an Operating Temperature Option (xxxxD-x-bpt)

<b>&lt;leave blank&gt;</b> = Commercial temperature (0 to 50°C)
<b>W</b> = Wide temperature (-40 to 60°C)
<b>Z</b> = Extended temperature (-40 to 75°C)
<b>Y</b> = Industrial temperature (-40 to 85°C) - Only available with 2 Pin DC models

© 2024 Omnitron Systems Technology, Inc. *miConverter* is a trademark of Omnitron Systems Technology, Inc. Trademarks are owned by their respective companies. Specifications subject to change without notice. All rights reserved.

