


PRODUCT OVERVIEW

The 1U 19" rack mount shelf accommodates iConverter® standalone media converters, iConverter 1-Module chassis, iConverter 2-Module chassis, OmniConverter™ media converters, FlexSwitch™ 2X4GT and iConverter GM4 5-Port, GM4 PoE/HPoE and XM5 Network Interface Devices.





INSTALLATION PROCEDURE

- 1) Unpacking, Visual Inspection and Inventory
- 2) Rack Mounting
- 3) General Installation
- 4) Installing iConverter and OmniConverter /SE Wall Mount Modules
- 5) Installing iConverter 2-Module Chassis
- 6) Installing OmniConverter /S and iConverter 1-Module Chassis

1) UNPACKING, VISUAL INSPECTION AND INVENTORY

Review the contents. The following items should be included:

• 1U Rack Mount Shelf

- User Manual
- 20 Small Plastic Snap Rivets (For mounting holes B, D, G & H)
- 20 Large Plastic Snap Rivets
- g holes B, D, G & H) (For mounting holes A, C, F & J)
- 2) RACK MOUNTING

Mount and attach the shelf to the 19" standard rack using the appropriate rack mounting screws (not included).

When rack-mounting the shelf, the rack should be appropriately earthgrounded. The shelf provides NEBS grounding posts to secure a grounding lug from the rack to the shelf.

The shelf has multiple mounting holes to accommodate the different module/chassis options. Use the Mounting Hole Guide to determine the correct mounting hole for the each unit installed on the shelf.

| 20 | ® 0 | | ۲ | | 0 0 | | • ()[] • • |
|-------------------------------------|--------|---------------------|------------------------|----------------------------|-----------------|---------------------------|--------------|
| 000000 | | 0000 0000 000 | °° | ° ° ° | 00 | °°°°°° | 0 000 °00 |
| ●G ●D B● ^C J●●A | ●F | °8●°° ○ ●A ○ | ° ● D ● C ● J | ° ●D °œ8● °●A ○●H | • G ° F•0 | °●D C● ₀ B● | |

First module/chassis mounting holes

Shelf with Mounting Holes

| Туре | | Mounting Holes | | | | | | | Rivet | | Shelf |
|---|---|----------------|---|---|---|---|---|---|-------|-------|----------|
| | | в | С | D | F | G | н | J | Small | Large | Capacity |
| iConverter Standalone Wall Mount Module | х | | | | | | | | | х | 4 |
| iConverter Standalone Tabletop Module w/Wall Mount Brackets (4381) | | x | | | | | | | x | | 4 |
| iConverter GM4 5-Port | | | x | | | | | | | х | 3 |
| iConverter GM4 PoE/HPoE | | | | | x | | | | | х | 2 |
| iConverter XM5 and XM5-1G | | | | | | | х | | х | | 2 |
| iConverter 1-Module Redundant Power Chassis w/Wall Mount Brackets (8249-0) | | | | | | x | | | x | | 2 |
| iConverter 1-Module Chassis w/Wall Mount Brackets (8249-0) | | | | x | | | | | x | | 3 |
| iConverter 2-Module Chassis w/Wall Mount Brackets (8249-0) | | | | x | | | | | x | | 2 |
| OmniConverter xPoE/SE and xPoE+/SE | х | | | | | | | | | х | 4 |
| OmniConverter xPoE/S and xPoE+/S | | | x | | | | | | | х | 3 |
| OmniConverter GPoE+/SX | | | | | | | | х | | х | 2 |
| FlexSwitch 2X4GT | | | x | | | | | | | х | 2 |

Mounting Hole, Rivet Guide and Shelf Capacity

3) GENERAL INSTALLATION

Use the Mounting Hole Guide to determine the correct mounting holes for the module/chassis type. Align the module to the appropriate mounting holes starting at the bottom left corner of the shelf and moving left to right across the shelf. Use the appropriate plastic snap rivets to mount the module to the shelf by pressing the rivets through the top of the wall mount bracket until the rivet locks into place.


Remove any rubber feet before installing the module/chassis to the shelf.

Embedded cable tie down slots secure the power cord(s) and data cable(s) to the shelf (cable ties not included). Grounding screws are available to attach a ground wire between the module and the shelf.

4) INSTALLING iConverter AND OmniConverter /SE WALL MOUNT MODULES

Up to four iConverter and/or OmniConverter /SE wall mount or tabletop modules can be mounted on the shelf.

In order to mount the iConverter tabletop module to the shelf, the optional wall mount brackets (4381) must be installed on the module.

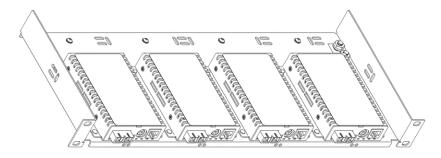


Shelf with iConverter Standalone Wall Mount Modules

5) INSTALLING iConverter 2-MODULE CHASSIS

Up to two iConverter 2-Module chassis can be mounted on the shelf.

In order to mount the iConverter 2-Module Chassis to the shelf, the optional wall mount brackets (8249-0) must be installed on the chassis (not included).

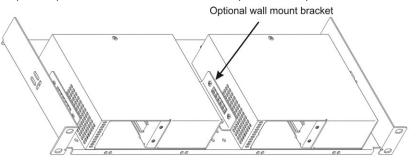


Shelf with iConverter 2-Module Chassis

NOTE: Mounting the 2-Module chassis to the shelf requires 2U rack spacing.

6) INSTALLING OmniConverter /S AND iConverter 1-MODULE CHASSIS

Up to three OmniConverter /S and/or iConverter 1-Module Chassis can be mounted on the shelf.

In order to mount the iConverter 1-Module Chassis to the shelf, the optional wall mount brackets (8249-0) must be installed on the chassis (not included).

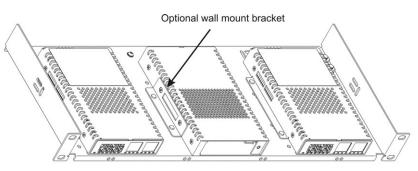

Shelf with OmniConverter /S and iConverter 1-Module Chassis

General and Copyright Notice

This publication is protected by U.S. and international copyright laws. All rights reserved. The whole or any part of this publication may not be reproduced, stored in a retrieval system, translated, transcribed, or transmitted, in any form, or by any means, manual, electric, electronic, electromagnetic, mechanical, chemical, optical or otherwise, without prior explicit written permission of Omnitron Systems Technology, Inc.

The following trademarks are owned by Omnitron Systems Technology, Inc.: FlexPoint[™], FlexSwitch[™], iConverter[®], miConverter[™], OmniConverter[™], Omnitron Systems Technology, Inc.[™], OST[™] and the Omnitron logo.

All other company or product names may be trademarks of their respective owners.

The information contained in this publication is subject to change without notice. Omnitron Systems Technology, Inc. is not responsible for any inadvertent errors.

Warranty

This product is warranted to the original purchaser against defects in material and workmanship for a period of two (2) years from the date of shipment. A LIFETIME warranty may be obtained by the original purchaser by registering this product within ninety (90) days from the date of shipment at www.omnitron-systems.com/support. During the warranty period, Omnitron will, at its option, repair or replace a product which is proven to be defective with the same product or with a product with at least the same functionality.

For warranty service, the product must be sent to an Omnitron designated facility, at Buyer's expense. Omnitron will pay the shipping charge to return the product to Buyer's designated US address using Omnitron's standard shipping method.

Limitation of Warranty

The foregoing warranty shall not apply to defects resulting from improper or inadequate use and/or maintenance of the equipment by Buyer, Buyer-supplied equipment, Buyer-supplied interfacing, unauthorized modifications or tampering with equipment (including removal of equipment cover by personnel not specifically authorized and certified by Omnitron), or misuse, or operating outside the environmental specification of the product (including but not limited to voltage, ambient temperature, radiation, unusual dust, etc.), or improper site preparation or maintenance.

No other warranty is expressed or implied. Omnitron specifically disclaims the implied warranties of merchantability and fitness for any particular purpose.

The remedies provided herein are the Buyer's sole and exclusive remedies. Omnitron shall not be liable for any direct, indirect, special, incidental, or consequential damages, whether based on contract, tort, or any legal theory.

Environmental Notices

The equipment covered by this manual must be disposed of or recycled in accordance with the Waste Electrical and Electronic Equipment Directive (WEEE Directive) of the European Community directive 2012/19/EU on waste electrical and electronic equipment (WEEE) which, together with the RoHS Directive 2011/65/EU, for electrical and electronic equipment sold in the EU after July 1, 2006. Such disposal must follow national legislation for IT and Telecommunication equipment in accordance with the WEEE directive: (a) Do not dispose waste equipment with unsorted municipal and household waste. (b) Collect equipment waste separately. (c) Return equipment using collection method agreed with Omnitron.

The equipment is marked with the WEEE symbol shown to indicate that it must be collected separately from other types of waste. In case of small items the symbol may be printed only on the packaging or in this manual. If you have questions regarding the correct disposal of equipment go to www.omniton-systems.com/supprt or e-mail to Omnitron at intlinfo@omnitron-systems.com.

©2017 Omnitron Systems Technology, Inc.



040-08260-001C 3/17