

OmniConverter® GLPoE/M Managed Single Pair Power over Ethernet Switch

The OmniConverter GLPoE/M is a managed Single Pair Power over Ethernet (SPoE) switch that is IEEE 802.3cg compliant and features copper or fiber uplink ports and four single-pair 10BASE-T1L copper SPoE user ports.

The Single Pair Power over Ethernet switch features four IEEE 802.3cg compliant 10BASE-T1L 3-pin SPoE terminal ports or IEC 63171-2 SPoE ports and two 10/100/1000 RJ-45 or 100/1000 fiber SFP uplink ports.

The GLPoE/M SPoE user ports detect and classify 30VDC class 10 - 12 and 58VDC class 13 -15 powered devices through DIP-switch selection.

The switch supports Dual Device mode, Directed Switch mode and Protected Uplinks.

Dual Device mode enables the module to operate as two independent and isolated Ethernet switches. In Dual Device mode, the GLPoE/M provides separate and independent data traffic paths between the two uplink ports and four user ports.

Directed Switch mode directs multicast traffic (such as video) only to the appropriate uplink port, preventing the multicast video traffic from flooding other network ports.

The switch supports protected uplinks using industrial ring Media Redundancy Protocol (MRP) or Spanning Tree Protocol or Redundant uplinks for high availability industrial network applications.

For daisy-chain applications, the second uplink port can be used to cascade multiple switches.

The mode of operation can be configured using easily accessible DIP-switches or using Web, Telnet, SSH, SNMPv1/v2c/v3 or Serial Console management interfaces. IPv4 and IPv6 are supported on the switches. These management interfaces provide access to filtering and security options, such as, broadcast storm prevention, IGMP, IEEE 802.1x, RADIUS, TACACS+ and Access Control Lists. Email notification and alarm reporting is provided.

The Small Form Pluggable (SFP) transceiver receptacle ports support 10/100/1000BASE-T and 1000BASE-T copper transceivers and 100Mbps and 1000Mbps standard, CWDM and DWDM fiber transceivers in a variety of distances and fiber types.

The switch can be wall mounted, rack mounted using a shelf (8260-0) or DIN-rail mounted using the DIN-rail mounting clips (8251-0). The switch is available with an external 100 to 240V AC power adapter or with a DC terminal connector.



SFPs not included

KEY FEATURES

- Managed Single-Pair Power over Ethernet switch
- Modbus Industrial Protocol for device management and monitoring
- Supports IPv4 and IPv6
- IEEE 802.1x, RADIUS, TACACS+ and ACL
- Email Notification
- Rapid and Multiple Spanning Tree Protocol
- Media Redundancy Protocol (MRP)
- IEEE 802.1ax LAG and LACP; Active/Active and Active/Standby
- IEEE 802.1Q VLAN tagging and IEEE 802.1ad Q-in-Q
- Broadcast / Multicast / Unicast Storm Prevention
- DHCP Relay Option 82, DHCPv6 and DHCPv6 Relay
- IPv4 IGMP and IPv6 MLD snooping
- Rate Limiting, Queue prioritization and Class of Service
- IEEE 802.1ab Link Layer Discovery Protocol
- Static MAC configuration and blocking of unknown Unicast/Multicast addresses
- Management via Web, Telnet, SSH, SNMPv1/v2c/v3 and serial interfaces
- Easy to use Hierarchical Command Line Interface
- SNMP management via Omnitron's NetOutlook® management software, or third-party SNMP software
- Dual Device mode for operating as two separate switches
- Directed Switch mode prevents flooding of multicast traffic
- Free 24/7/365 Technical Support

ADDITIONAL FEATURES


- Four IEEE 802.3cg Single-Pair Power over Ethernet SPoE 30/58VDC user ports
- Supports 3-Pin SPE Terminal connector or IEC 63171-2 SPE connector
- Two SFP or two 10/100/1000 RJ-45 uplink ports
- Supports 10/100/1000 and 1G copper SFP transceivers
- Supports 100Mbps and 1000Mbps fiber SFPs
- AC to DC Power Adapter or 2-Pin DC terminal
- Wall, Rack and DIN-rail mountable
- Fan-less design for long life
- Commercial (0° to 50°C), wide (-40° to 60°C) and extended (-40° to 75°C) operating temperature ranges
- TAA, BAA and NDAA compliant, and Made in the USA

APPLICATIONS

Dual Device Mode Application

This Dual Device feature is extremely useful when two isolated networks domains share a single network distribution location.


The example below depicts a scenario where a surveillance security (green) network and a Wi-Fi (purple) network are sharing a single hub distribution location. Using the two uplinks and the Dual Device mode facilitates using a single switch driving both the Cameras and the Wi-Fi Access Points across SPE cabling while maintaining isolation between the networks. In this scenario, no AC power is required at the far end. The OmniConverter GLPoE/M is sending power down the SPE cabling and powering the OmniConverter 10TPS/LPD. In turn, the OmniConverter 10TPS/LPD is powering the Cameras and Access Points.

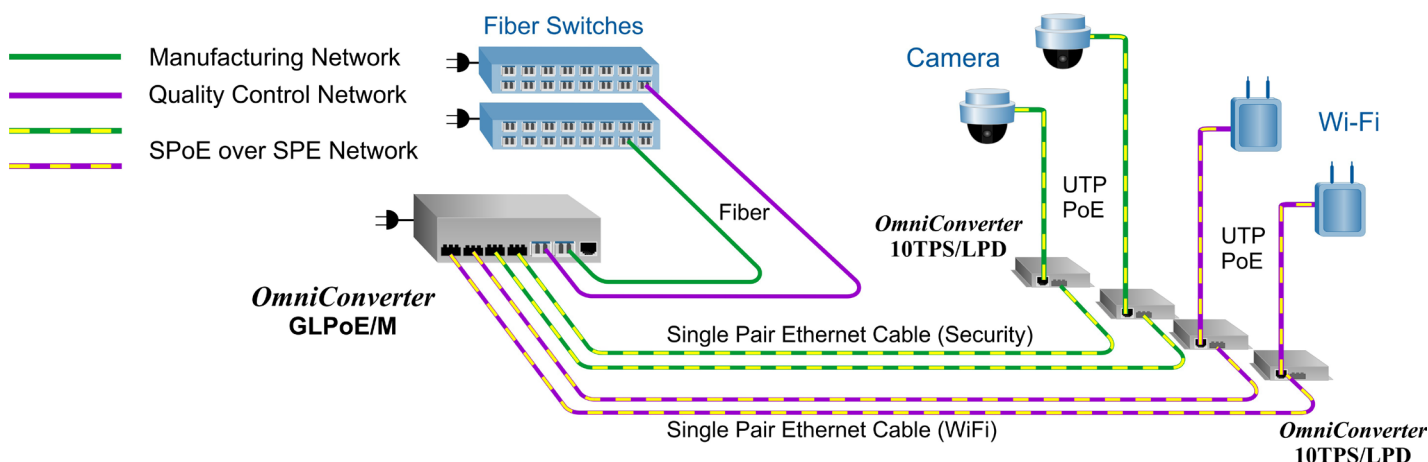

APPLICATIONS

Building Automation Application

This example shows a managed Building Automation application using an OmniConverter GLPoE/M and 10TPS/LPD modules to connect building systems back to a centralized control room. No external AC power is required since the 10TPS/LPD modules are powered by the GLPoE/M switch over the SPE cable and the building systems are powered by the 10TPS/LPD modules. Systems controlled by the OmniConverter modules include Motion Detection, Lighting, Elevator Control, Access Control to Floors, Security Surveillance and HVAC.

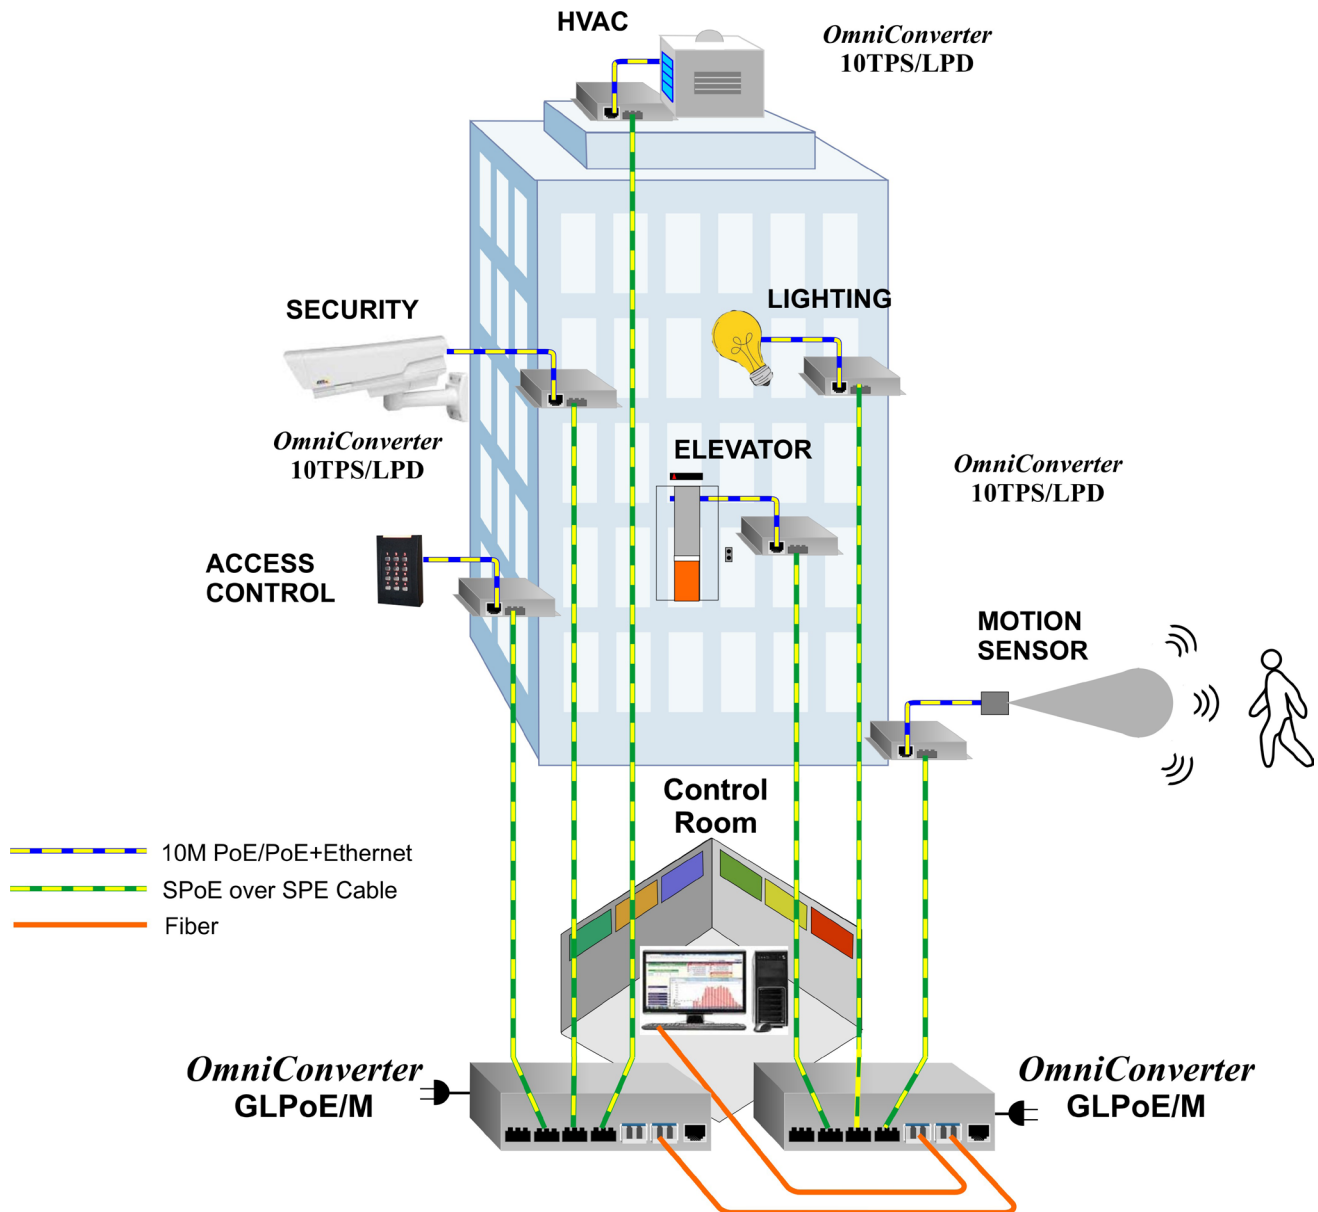

SPECIFICATIONS

Description	OmniConverter® GLPoE/M 10T/T1L to 100/1000 Fiber or 10/100/1000 Copper Uplinks Managed SPoE Ethernet Switch
Standard Compliances	IEEE 802.3, IEEE 802.3cg, IEEE 802.1Q, IEEE 802.1ad, IEEE 802.1ab, IEEE 802.1ax, IEEE 802.1w RSTP/MSTP, RFC 5424, RFC 4541, RFC 2710, IEC 624339-2, SMTP, SNTP, RADIUS, TACACS+, IEEE 802.1x
Regulatory Compliances (Pending)	<p>Safety: UL 62368-1, UL 60950-1, IEC 62368-1, IEC 60950-1, EN 62368-1, EN 60950-1, CAN/CSA C22.2 No. 62368-1-14, CAN/CSA C22.2 No. 60950-1, CE Mark, UKCA</p> <p>EMC: EN 55032/24 CE Emissions/Immunity, IEC 61000-6-4 Industrial Emissions, IEC 61000-6-2 Industrial Immunity</p> <p>EMI: CISPR 32, FCC 47 Part 15 Subpart B Class A</p> <p>EMS: IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV (DC models), IEC 61000-4-4 EFT: Power: 1 kV; Signal: 1 kV (AC models), IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV (DC models), IEC 61000-4-5 Surge: Power: 1 kV Line/Line; 2 kV Line/Gnd; Signal: 2 kV (AC models), IEC 61000-4-6 CS: Signal: 10 V, IEC 61000-4-8 (Magnetic Field) 30A/m, IEC 61000-4-11 (Voltage Dips, interrupts)</p> <p>IP Rating: IP20 Protection</p> <p>ACT: TAA, BAA, NDAA</p>
Environmental	REACH, RoHS and WEEE
SPoE Mode	30 VDC for Class 10 - 12 PDs, max 51 watts 58 VDC for Class 13- 15 PDs, max 316 watts
Management	IPv4 and IPv6 address Web, Telnet, SSH, SNMPv1/v2c/v3 In-Band management via Ethernet port Out-of-band management via serial port
Frame Size	10BASE-T1L: Up to 2,048 bytes RJ-45: Up to 10,240 bytes SFP: 100M - up to 2,048 bytes 1000M - up to 10,240 bytes
Port Types	10BASE-T1L: 3-Pin SPE Terminal connector or IEC 63171-2 SPE connector RJ-45: 10/100/1000BASE-T SFP: 10/100/1000BASE-T SGMII Copper Transceiver, 100BASE-X or 1000BASE-X Fiber Transceiver
Cable Types	10BASE-T1L: Single-Pair Ethernet (SPE) cable, IEC 61156-13 (fixed) or IEC 61156-14 (flexible) 18AWG cable or better RJ-45: EIA/TIA 568A/B, Cat 5 UTP and higher Fiber: Multimode: 50/125, 62.5/125µm Single-mode: 9/125µm
AC Power Requirements (Models with AC/DC Adapters)	100 - 240VAC/50 - 60Hz 3.5A max at 115VAC; 2.5A max at 230VAC
DC Power Requirements (Models with DC Terminals)	+50 to +58VDC; 5.82A @ 56VDC 2 Pin Terminal (isolated)
Dimensions (W x D x H)	6.28" x 5.2" x 1.5" (159.5 mm x 132.1 mm x 38.1 mm)
Weight	Module Only: 1.5 lb.; 720 grams Module with AC/DC Adapter: 2.0 lbs.; 913 grams
Operating Temperature	Commercial: 0 to 50°C Wide: -40 to 60°C (-20°C AC cold start) Extended: -40 to 75°C (-20°C AC cold start) Storage: -40 to 80°C
Humidity	5 to 95% (non-condensing)
Altitude	-100m to 4,000m (operational)
MTBF (hours)	Module Only: 206,000 AC/DC Adapter: 100,000
Warranty	5 year product warranty with 24/7/365 free Technical Support and 2 year AC power adapter warranty

ORDERING INFORMATION

Step 1: Choose a Base Part Number (2930-x-4c-pt)

Model Number	Description
2930-0-4c-pt	4 x 10BASE-T1L SPoE 30/58V + 2 x 100/1000 SFP Ports
2930-1-4c-pt	4 x 10BASE-T1L SPoE 30/58V + 2 x 10/100/1000 RJ-45 Ports

Step 2: Choose a SPE Connector Type (2930-x-4c-pt)

0 = 3-pin SPE Terminal Connector
2 = IEC 63171-2 SPE Connector

Step 3: Choose a Power Option (2930-x-4c-pt)

1 = External AC/DC Adapter, 100 - 240 VAC included, with US Power Cord
2 = External AC/DC Adapter, 100 - 240 VAC included, No Power Cord
8 = External AC/DC Adapter, 100 - 240 VAC included, PS JET/PSE Certified, with Japanese Power Cord
9 = Direct DC 2 pin terminal connector, no AC/DC power adapter

Step 4: Choose an Operating Temperature Option (2930-x-4c-pt)

<leave blank> = Commercial temperature (0 to 50°C)
W = Wide temperature (-40 to 60°C)
Z = Extended temperature (-40 to 75°C)

ACCESSORIES

Model Number	Description
8251-0	DIN-Rail Mounting Clip
8260-0	19" rack mount shelf (up to 2 modules)