

Omniconverter[®]
GXPoE+/S and GXHPoE/S

Unmanaged 30W and 60W Gigabit PoE Extender
with Booster Technology



User Manual

General and Copyright Notice

This publication is protected by U.S. and international copyright laws. All rights reserved. The whole or any part of this publication may not be reproduced, stored in a retrieval system, translated, transcribed, or transmitted, in any form, or by any means, manual, electric, electronic, electromagnetic, mechanical, chemical, optical or otherwise, without prior explicit written permission of Omnitron Systems Technology, Inc.

The following trademarks are owned by Omnitron Systems Technology, Inc.: FlexPoint™, FlexSwitch™, iConverter®, miConverter™, NetOutlook®, OmniLight®, OmniConverter®, RuggedNet®, Omnitron Systems Technology, Inc.™, OST™ and the Omnitron logo.

All other company or product names may be trademarks of their respective owners.

The information contained in this publication is subject to change without notice. Omnitron Systems Technology, Inc. is not responsible for any inadvertent errors.

Warranty

This product is warranted to the original purchaser (Buyer) against defects in material and workmanship for a period of two (2) years from the date of shipment. A lifetime warranty may be obtained by the original purchaser by registering this product at www.omnitron-systems.com/support within ninety (90) days from the date of shipment. During the warranty period, Omnitron will, at its option, repair or replace a product which is proven to be defective with the same product or with a product with at least the same functionality.

For warranty service, the product must be sent to an Omnitron designated facility, at Buyer's expense. Omnitron will pay the shipping charge to return the product to Buyer's designated US address using Omnitron's standard shipping method.

Limitation of Warranty

The foregoing warranty shall not apply to product malfunctions resulting from improper or inadequate use and/or maintenance of the equipment by Buyer, Buyer-supplied equipment, Buyer-supplied interfacing, unauthorized modifications or tampering with equipment (including removal of equipment cover by personnel not specifically authorized and certified by Omnitron), or misuse, or operating outside the environmental specification of the product (including but not limited to voltage, ambient temperature, radiation, unusual dust, etc.), or improper site preparation or maintenance.

No other warranty is expressed or implied. Omnitron specifically disclaims the implied warranties of merchantability and fitness for any particular purpose.

The remedies provided herein are the Buyer's sole and exclusive remedies. Omnitron shall not be liable for any direct, indirect, special, incidental, or consequential damages, whether based on contract, tort, or any legal theory.

Environmental Notices

The equipment covered by this manual must be disposed of or recycled in accordance with the Waste Electrical and Electronic Equipment Directive (WEEE Directive) of the European Community directive 2012/19/EU on waste electrical and electronic equipment (WEEE) which, together with the RoHS Directive 2015/863/EU, for electrical and electronic equipment sold in the EU after July 2019. Such disposal must follow national legislation for IT and Telecommunication equipment in accordance with the WEEE directive: (a) Do not dispose waste equipment with unsorted municipal and household waste. (b) Collect equipment waste separately. (c) Return equipment using collection method agreed with Omnitron.

The equipment is marked with the WEEE symbol shown to indicate that it must be collected separately from other types of waste. In case of small items the symbol may be printed only on the packaging or in the user manual. If you have questions regarding the correct disposal of equipment go to www.omnitron-systems.com/support or e-mail to Omnitron at intlinfo@omnitron-systems.com.



Safety Warnings and Cautions



ATTENTION: Observe precautions for handling electrostatic discharge sensitive devices.



WARNING: Potential damage to equipment and personal injury.



WARNING: Risk of electrical shock.

Customer Support Information

If you encounter problems while installing this product, contact Omnitron Technical Support:

Phone: (949) 250-6510

Fax: (949) 250-6514

Address: Omnitron Systems Technology, Inc.

38 Tesla

Irvine, CA 92618, USA

Email: support@omnitron-systems.com

URL: www.omnitron-systems.com

040-02000-001C 10/23

OmniConverter® GXPoE+/S and GXHPoE/S User Manual

Product Overview


OmniConverter GXPoE+/S and GXHPoE/S are unmanaged copper gigabit Ethernet PoE Extenders. They enable the delivery of Ethernet data and Power over Ethernet (PoE) beyond the standard 100 meter limit of twisted pair copper cabling.



OmniConverter GXPoE+/S or GXHPoE/S 2 and 3-Port Models

Front Panel

The OmniConverter GXPoE+/S and GXHPoE/S are 10/100/1000BASE-T Ethernet extenders that function as both Powered Devices (PD) and Power Sourcing Equipment (PSE). The front of the PoE Extender provides access to one RJ-45 PoE/PD port, one or two RJ-45 PoE/PSE ports and a bank of DIP-switches.

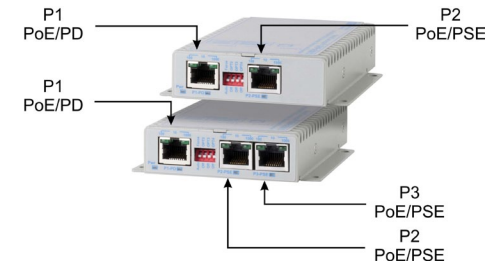

Front Panel Layout

RJ-45 Ports

The RJ-45 Ethernet ports support 10BASE-T, 100BASE-TX and 1000BASE-T speeds, auto-negotiation and auto MDI/MDI-X crossover.

The GXPoE+/S PoE/PD port can be powered by a IEEE 802.3at (30W) or High-Power 60W switch. When powered by IEEE 802.3at or High-Power 60W, the PoE/PSE ports can provide up to 20 watts and support 802.3af, 802.3at and 802.3bt compliant devices. When a non-PoE device, such as a laptop, is connected to the PoE Extenders for data only applications, no power is applied.

The GXHPoE/S PoE/PD port can be powered by a IEEE 802.3at (30W) or High-Power 60W switch. When powered by IEEE 802.3at, the PoE/PSE ports can provide up to 20 watts and support 802.3af, 802.3at and 802.3bt compliant devices. When powered by High-Power 60W, the PoE/PSE ports can provide up to 44 watts and support 802.3af, 802.3at and 802.3bt compliant devices. When a non-PoE device, such as a laptop, is connected to the PoE Extenders for data only applications, no power is applied.

Booster Technology

Due to the voltage drop across copper cabling, the voltage at the end of an extended topology can be below the minimum IEEE voltage requirement for the attached PD. OmniConverter PoE Extenders have smart voltage-boosting technology that boosts the output voltage to 56 to 57VDC to ensure compliance with the IEEE specification between PoE Extender in a daisy chain.

Installation Procedure

- 1) Configure DIP-switches
- 2) Example Topologies
- 3) Determine the Amount of PoE Power Available
- 4) Connect Cables and Devices
- 5) Verify Operation

1) Configure DIP-switches

DIP-switches are located on the front of the OmniConverter PoE Extender.



DIP-switch Bank Locations

The table below provides a description of each DIP-switch position and function.

Switch	Position	Function
SW1 - SW4	Left	Reserved
	Right	

DIP-switch Definitions for GXPoE+/S

Switch	Position	Function
SW1	Left	Port 1 PoE/PD - Auto (Factory default)
	Right	Port 1 PoE/PD - Force up to 60 watts
SW2	Left	Port 2 PoE/PSE - Auto (Factory default)
	Right	Port 2 PoE/PSE - Force up to 60 watts
SW3	Left	Port 3 PoE/PSE - Auto (Factory default)
	Right	Port 3 PoE/PSE - Force up to 60 watts
SW4	Left / Right	Reserved

DIP-switch Definitions for GXHPoE/S

SW1: Port 1 PD - “Auto/Force”

When the Port 1 Auto/Force DIP-switch is in the default Auto position, the PoE/PD port is in the auto mode, it will negotiate using 2 pair power if the input power is 802.3af, or 4 pair power if the input power is 802.3at or High-Power 60 watts. 2 and 4 pair operation depends on the input power and the model of the extender. The GXHPoE/S negotiates PoE power on 4 pairs and the GXPoE+/S negotiates PoE power on 2 pairs.

When this DIP-switch is in the Force position, the PoE/PD port is in the forced mode and configured for 4 pair operation allowing up to 60 watt input power. Forced operation depends on the input power and the model of the extender.

SW2 and SW3: Port 2 and Port 3 - “Auto/Force”

When these DIP-switches are in the default Auto position, the port will automatically perform the IEEE standard PoE detection, classification and powering functions to the attached PD.


When these DIP-switches are in the Force position, a maximum of 60 watts of power will be available to the PD.

SW4: Reserved


2) Example Topologies

The PoE Extenders can be deployed in a daisy chain topology, dropping one or two PDs from a single extender or dropping a PD at the end of the daisy chain. Other combinations can be supported depending on the amount of PoE power available.


Daisy Extension

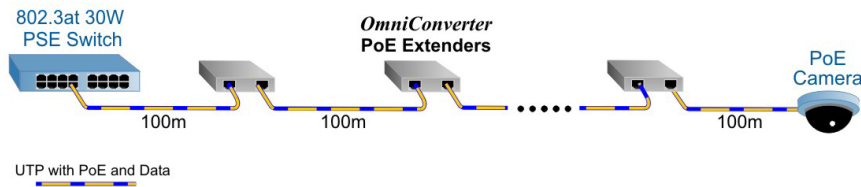

Drop and Extend

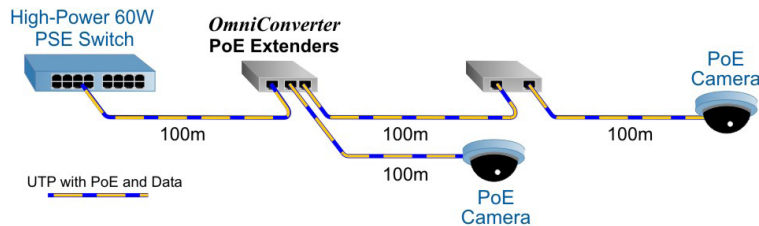

Dual Device Drop Off

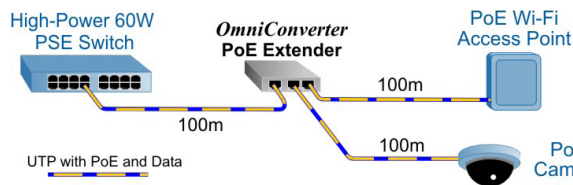

3) Determine the Amount of PoE Power Required

There are several factors to consider when extending Powered Devices over standard copper cabling.

- The power source: 802.3at (30 watts) or High-Power (60 watts)
- The power required by the PD: Class of PD: 802.3af, 802.3at or 60W
- The power loss in the cabling: Category 5, Category 5e or Category 6
- The power consumed by the PoE Extender:

Power Consumption per PoE Extender		
PoE Extenders in a Daisy Chain	802.3at 30W PSE	High-Power 60W PSE
1st Extender	6.6 watts	9 watts
2nd Extender	5.9 watts	8 watts
3rd Extender	5.4 watts	7 watts
4th Extender	4.9 watts	6.2 watts
5th Extender	-	5.7 watts
6th Extender	-	5.2 watts
7th Extender	-	4.9 watts

NOTE: The PoE Extender will consume less power depending on the Class of PD attached to the PoE/PSE port.

The table below provides a summary of the distance versus available power when multiple PoE extenders are connected.

PSE Source Power	Number of Extenders	Distance Meters / Feet	Available Power for PD per Cable Type		
			Category 5	Category 5e	Category 6
802.3at 30W	1	200m / 656 ft.	17.6 watts	18.6 watts	19.9 watts
	2	300m / 984 ft.	11.3 watts	12.2 watts	13.5 watts
	3	400m / 1,312 ft.	6.0 watts	6.7 watts	7.9 watts
	4	500m / 1,640 ft.	1.2 watts	1.8 watts	2.9 watts
High-Power 60W	1	200m / 656 ft.	38.8 watts	40.8 watts	43.5 watts
	2	300m / 984 ft.	29.2 watts	31.1 watts	34.0 watts
	3	400m / 1,312 ft.	21.4 watts	23.2 watts	25.9 watts
	4	500m / 1,640 ft.	14.8 watts	16.6 watts	19.0 watts
	5	600m / 1,968 ft.	9.1 watts	10.7 watts	12.9 watts
	6	700m / 2,296 ft.	4.0 watts	5.4 watts	7.4 watts
	7	800m / 2,624 ft.	-	Data Only	2.4 watts

4) Connect Cable and Devices

- Connect the RJ-45 port on the PoE PSE equipment to the P1-PD port on the OmniConverter GXPoE+/S or GXHPoE/S using a Category 5 or better cable.
- Verify the PWR and P1-PD LEDs on the OmniConverter GXPoE+/S or GXHPoE/S are functioning per the LED table on the next page.
- Connect the RJ-45 P2-PSE or P3-PSE port on the OmniConverter GXPoE+/S or GXHPoE/S to the Powered Device using a Category 5 or better cable.
- Verify the P2-PSE or P3-PSE LED on the OmniConverter GXPoE+/S or GXHPoE/S is functioning per the LED table on the next page.

5) Verify Operation


Verify the GXPoE+/S or GXHPoE/S is operational by viewing the LED indicators.

Once power is applied through the PoE/PD port on the module, all module functions are active. The PoE/PSE port is operational and will start detecting / classifying once a PD device is attached to the port.




This facilitates installation and troubleshooting by ensuring each link is operational. This is especially beneficial when multiple Extenders are daisy chained.

Power - LED Indicators		
Legend	Indicator	Description
Pwr	OFF	Unit not powered
	Green - ON	Unit powered

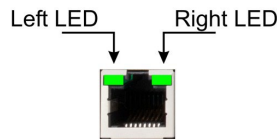


Power LED Indicators






Front Panel LED Locations

PoE/PD Port - LED Indicators			
Legend	Location	Indicator	Description
P1-PD	Top and Front of the Module	OFF	No PSE power
		Green - single blink	Powered by 802.3af PoE 15W
		Green - two blinks	Powered by 802.3at PoE 30W
		Green - three blinks	Powered by HPoE 60W
10	Located on RJ-45  Both Left & Right LED	OFF	No link
		Green - ON	Port linked at 10Mbps
		Green - Blinking at 20Hz	Port data activity at 10Mbps
100	Located on RJ-45  Left LED	OFF	No link
		Green - ON	Port linked at 100Mbps
		Green - Blinking at 20Hz	Port data activity at 100Mbps
1000	Located on RJ-45  Right LED	OFF	No link
		Green - ON	Port linked at 1000Mbps
		Green - Blinking at 20Hz	Port data activity at 1000Mbps

PoE/PD LED Indicator


PoE/PSE Port 2 - LED Indicators			
Legend	Location	Indicator	Description
P2-PSE	Top and Front of the Module	OFF	No PSE power
		Green - single blink	Powered by 802.3af PoE 15W
		Green - two blinks	Powered by 802.3at PoE 30W
		Green - three blinks	Powered by HPoE 60W or 802.3bt
		Yellow - ON	Failed PoE negotiation
		Yellow - Blinking at 1Hz	Can not provide the requested power
10	Located on RJ-45  Both Left & Right LED	OFF	No link
		Green - ON	Port linked at 10Mbps
		Green - Blinking at 20Hz	Port data activity at 10Mbps
100	Located on RJ-45  Left LED	OFF	No link
		Green - ON	Port linked at 100Mbps
		Green - Blinking at 20Hz	Port data activity at 100Mbps
1000	Located on RJ-45  Right LED	OFF	No link
		Green - ON	Port linked at 1000Mbps
		Green - Blinking at 20Hz	Port data activity at 1000Mbps

P2 PoE/PSE LED Indicator

PoE/PSE Port 3 - LED Indicators			
Legend	Location	Indicator	Description
P3-PSE	Top and Front of the Module	OFF	No PSE power
		Green - single blink	Powered by 802.3af PoE 15W
		Green - two blinks	Powered by 802.3at PoE 30W
		Green - three blinks	Powered by HPoE 60W or 802.3bt
		Yellow - ON	Failed PoE negotiation
		Yellow - Blinking at 1Hz	Can not provide the requested power
10	Located on RJ-45  Both Left & Right LED	OFF	No link
		Green - ON	Port linked at 10Mbps
		Green - Blinking at 20Hz	Port data activity at 10Mbps
100	Located on RJ-45  Left LED	OFF	No link
		Green - ON	Port linked at 100Mbps
		Green - Blinking at 20Hz	Port data activity at 100Mbps
1000	Located on RJ-45  Right LED	OFF	No link
		Green - ON	Port linked at 1000Mbps
		Green - Blinking at 20Hz	Port data activity at 1000Mbps

P3 PoE/PSE LED Indicator

Mechanical

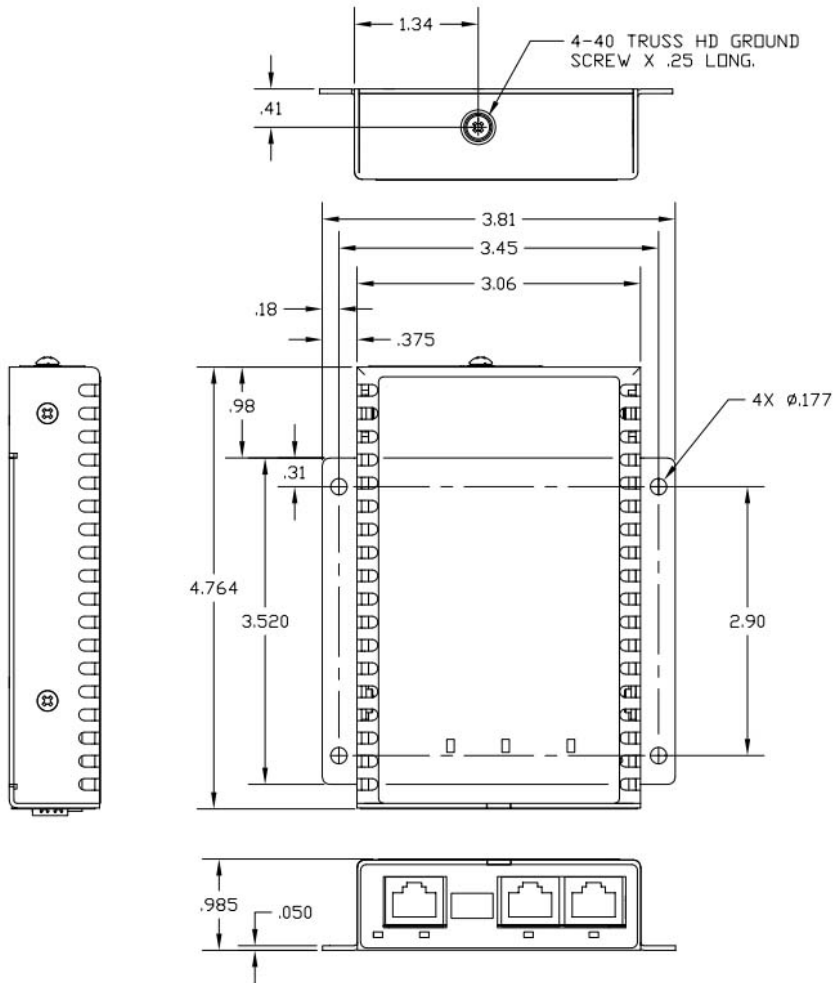

Specifications

Standard Compliances	IEEE 802.3, IEEE 802.3at PoE+, IEEE 802.3bt, High-Power 60W PoE	
Environmental	REACH, RoHS and WEEE	
PoE/PD Mode	IEEE Alternate A (Alt A)	
Frame Size	Up to 10,240 bytes	
Port Types	Copper:	10/100/1000BASE-T (RJ-45)
Cable Types	Copper:	EIA/TIA 568A/B, Cat 5 UTP and higher
Power Requirements	PoE/PD (input): PoE/PSE (output):	+/-42.5 to +/-57VDC (per IEEE) +/-50 to +/-57VDC (per IEEE) 56VDC (typical)
Dimensions (W x D x H)	3.8" x 4.8" x 1.0" (96.52 mm x 121.92 mm x 25.4 mm)	
Weight	0.82 lbs (372 grams)	
Operating Temperature*	Commercial: Wide:	0 to 50°C -40 to +60°C
Humidity	5 to 95% (non-condensing)	
Altitude	-100m to 4,000m (operational)	
MTBF (hours)	1xPD Port + 1xPSE Port: 375,000 1xPD Port + 2xPSE Ports: 317,000	
Warranty	Lifetime warranty with 24/7/365 free Technical Support	

Standards and Compliances

Safety	UL 62368-1, UL 60950-1, IEC 62368-1, IEC 60950-1, EN 62368-1, EN 60950-1, CAN/CSA C22.2 No. 62368-1-14, CAN/CSA C22.2 No. 60950-1, CE Mark, UKCA
EMC	EN 55032/24 CE Emissions/Immunity, IEC 61000-6-4 Industrial Emissions, IEC 61000-6-2 Industrial Immunity
EMI	CISPR 32, FCC 47 Part 15 Subpart B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m (passed industrial rating of 10V/m), IEC 61000-4-4 EFT: Power: 1 kV (passed industrial rating of 2 kV), IEC 61000-4-4 EFT: Signal: 0.5 kV (passed industrial rating of 1 kV), IEC 61000-4-5 Surge: Power: 1 kV (passed industrial rating of 2 kV), IEC 61000-4-5 Surge: Signal: 1 kV, IEC 61000-4-6 CS: Signal: 3 Vrms (passed industrial rating of 10 Vrms)
ACT	TAA, BAA, NDAA
IP Rating	IP20 Protection